



LINEA 120-125-127-128-130 | BOBINE

BOBINA 22MM



DATI TECNICI

Tensione 12V DC, 24V DC, 24V AC, 110V AC, 220V AC

Tolleranza di tensione +/- 10%



Assorbimento AC=5VA DC=3,0 W

Inserimento ED 100%

Protezione con connettore IP 65 EN 60529



CODICE	REF.	LINEA
A502600018	BOBINA (COIL) DC12V	120-125-127-128-130
A502600006	BOBINA (COIL) DC24V	120-125-127-128-130
A502600007	BOBINA (COIL) AC24V 50/60HZ	120-125-127-128-130
A502600008	BOBINA (COIL) AC110V 50/60HZ	120-125-127-128-130
A502600009	BOBINA (COIL) AC220V 50/60HZ	120-125-127-128-130

BOBINA 22MM CON CERTIFICAZIONE "UL"



CODICE	REF.	LINEA
A502600048	BOBINA "UL" (COIL) DC24V (DC12V)	120-125-127-128-130
A502600049	BOBINA "UL" (COIL) AC24V (DC12V)	120-125-127-128-130
A502600050	BOBINA "UL" (COIL) AC110V	120-125-127-128-130
A502600051	BOBINA "UL" (COIL) AC220V	120-125-127-128-130


BOBINA ATEX ANTIDEFLAGRANTE CON CAVO



CODICE	REF.	LINEA
1341A00001	BOBINA 30x30 mm 24 V DC cavo L3 mt	120-125-127-128-130
1341A00002	BOBINA 30x30 mm 24 V AC cavo L3 mt	120-125-127-128-130
1341A00003	BOBINA 30x30 mm 48 V AC cavo L3 mt	120-125-127-128-130
1341A00004	BOBINA 30x30 mm 220 V AC cavo L3 mt	120-125-127-128-130

LINEA 120-125-127-128-130 | CONNETTORI


CONNETTORE

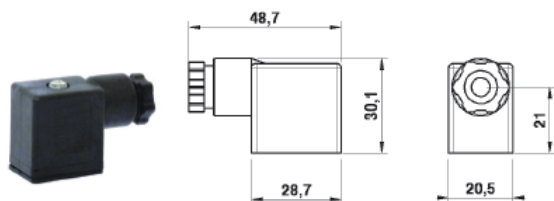

CODICE	REF.	LINEA
A502600010	CONNETTORE SP 22mm	120-125-127-128-130


* Il connettore è conforme alla certificazione "UL"

CONNETTORI LUMINOSI 22MM

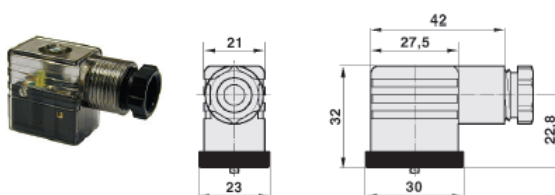

CODICE	REF.	LINEA
A502600026	CONNETTORE LUMINOSO 22mm 24V	120-125-127-128-130
A502600027	CONNETTORE LUMINOSO 22mm 115V	120-125-127-128-130
A502600028	CONNETTORE LUMINOSO 22mm 230V	120-125-127-128-130

CONNETTORE LUMINOSO 22MM CABLATO

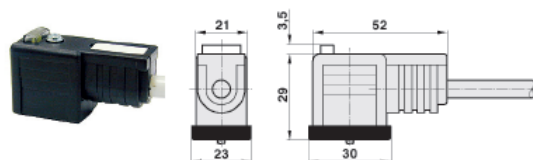

CODICE	REF.	LUNGHEZZA	LINEA
A202600029	CONNETTORE LUMINOSO 22mm 24V	3mt	120-125-127-128-130
A502600030	CONNETTORE LUMINOSO 22mm 115V	3mt	120-125-127-128-130
A502600031	CONNETTORE LUMINOSO 22mm 230V	3mt	120-125-127-128-130

TRATTAMENTO ARIA

VALVOLE

CILINDRI

RACCORDI